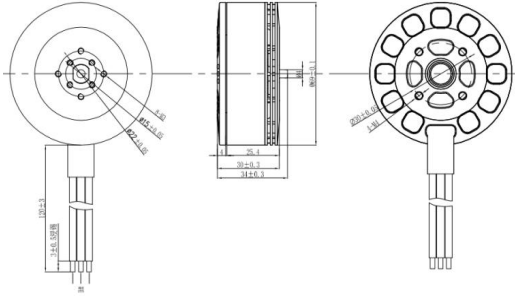


外形图				装配图				
使用电压	12S	电调	80A	电机外径	Φ69*34mm			
KV值	170	适配桨叶	20-22寸	安装孔	Φ15/Φ22mm 4-M3			
空载电流	0.8A (7.4V)	最大功率	1850W(300s)		Φ30mm 4-M4			
电机型号	重量(g)	测试桨叶	电压(V)	电流(A)	功率(W)	拉力(g)	力效(g/w)	油门点
6215B KV170 80A方波电调	318	2280 碳纤维桨	44.4	0.89	40	480	12	10%
			44.4	2.09	92.1	980	10.64060803	20%
			44.4	3.92	175.8	1640	9.328782708	30%
			44.4	7.43	327	2620	8.012232416	40%
			44.4	11.67	521	3730	7.159309021	50%
			44.4	16.99	762.4	4800	6.29590766	60%
			44.4	24.03	1068.4	6060	5.672032946	70%
			44.4	32.17	1425	7350	5.157894737	80%
			44.4	42.66	1846.5	8850	4.79285134	90%
			44.4	45.09	1986	9120	4.592145015	100%
使用电压	6S	电调	80A	电机外径	Φ69*34mm			
KV值	320	适配桨叶	20-24寸	安装孔	Φ15/Φ22mm 4-M3			
空载电流	1.4A (7.4V)	最大功率	1200W		Φ30mm 4-M4			
6215B KV320 80A方波电调	318	2280 碳纤维桨	22.2	1.19	26.6	240	9.022556391	10%
			22.2	3.02	66.6	520	7.807807808	20%
			22.2	5.56	123.3	1004	8.142741281	30%
			22.2	9.61	211.5	1720	8.132387707	40%
			22.2	15.8	346.5	2500	7.215007215	50%
			22.2	22.67	495.1	3680	7.43284185	60%
			22.2	31.12	672	4200	6.25	70%
			22.2	42.05	903	5200	5.758582503	80%
			22.2	56.01	1180	6230	5.279661017	90%
			22.2	56.01	1180	6230	5.279661017	100%